



Product Specification

() Preliminary Specification

() Final Specification

Customer	
Model Name	Z101WS07
Description	Standard LCD Module 1024(RGB)x600 Dots 10.1" TFT LCD
Date	2018/09/07
Revision	1.0

Engineering			
Check	Date	Prepared	Date



Table of Contents

1. Record of Revision.....	3
2 General Specifications.....	4
3 Input/Output Terminals.....	5
4 Absolute Maximum Ratings.....	6
5 Electrical Characteristics.....	6
6 Optical Characteristics.....	11
7 Environmental / Reliability Tests.....	14
8 Mechanical Drawing.....	15
9 Packing.....	16
10 Precautions For Use of LCD modules.....	16



1. Record of Revision

Rev	Issued Date	Description	Editor
1.0	2018/9/7	First Release.	KING



2 General Specifications

	Feature	Spec
Characteristics	Size	10.1 inch
	Resolution	1024(horizontal)*600(Vertical)
	Interface	LVDS
	Connect type	Connector
	Color Depth	262K
	Technology type	a-Si
	Pixel pitch (mm)	0.2175*0.2088
	Pixel Configuration	R.G.B.-Stripe
	Display Mode	Normally White Transmissive
	Driver IC	TBD
	Surface Treatment	HC
	Viewing Direction	12 O'CLOCK
	Gray scale Direction	6 O'CLOCK
Mechanical	LCM (W x H x D) (mm)	235*143*4.9
	Active Area(mm)	222.72 x 125.28
	With /Without TSP	Without TSP
	Weight (g)	TBD
	LED Numbers	36 LEDs

Note 1: Viewing direction is follow the data which measured by optics equipment.

Note 2: Requirements on Environmental Protection: RoHS

Note 3: LCM weight tolerance: +/- 5%



3 Input/Output Terminals

No.	Symbol	Description
1	VCOM	Common Voltage
2	VDD	Power Voltage for digital circuit
3	VDD	Power Voltage for digital circuit
4	NC	No connection
5	RESET	Global reset pin
6	STBYB	Standby mode/Normal mode: Pull high/Pull Low
7	GND	Ground
8	RXIN0-	-LVDS differential data input
9	RXIN0+	+LVDS differential data input
10	GND	Ground
11	RXIN1-	-LVDS differential data input
12	RXIN1+	+LVDS differential data input
13	GND	Ground
14	RXIN2-	-LVDS differential data input
15	RXIN2+	+LVDS differential data input
16	GND	Ground
17	RXCLKIN-	-LVDS differential clock input
18	RXCLKIN+	+LVDS differential clock input
19	GND	Ground
20	RXIN3-	-LVDS differential data input
21	RXIN3+	-LVDS differential data input
22	GND	Ground
23	NC	No connection
24	NC	No connection
25	GND	Ground
26	NC	No connection
27	NC	No connection
28	SELB	8bit/6bit data format selection: Pull high for 6bit, Pull low for 8bit
29	AVDD	Power for Analog Circuit
30	GND	Ground
31	LED-	LED Cathode
32	LED-	LED Cathode
33	L/R	Horizontal inversion (Note 3)
34	U/D	Vertical inversion (Note 3)
35	VGL	Gate oFF Voltage
36	NC	--



37	NC	--
38	VGH	Gate ON Voltage
39	LED+	LED Anode
40	LED+	LED Anode

4 Absolute Maximum Ratings

Item	Symbol	MIN	MAX	Unit	Remark
Digital Supply Voltage	V _{DD}	-0.3	3.96	V	
TFT Gate on Voltage	VGH	-0.3	40	V	
TFT Gate off Voltage	VGL	-20	0.3	V	
Analog power Supply Voltage	AVDD	-0.5	14.85	V	
Operating Temperature	T _{OPR}	-20	70	°C	
Storage Temperature	T _{STG}	-30	80	°C	
Humidity	R _H	-	90%	RH	

5 Electrical Characteristics

5.1 Typical Operation Conditions

Item	Symbol	MIN	Typ	MAX	Unit	Remark
Digital Supply Voltage	DVDD	3	3.3	3.6	V	
TFT Gate on Voltage	VGH	17	21	23	V	
TFT Gate off Voltage	VGL	-9	-8	-5.4	V	
Analog power Supply Voltage	AVDD	8.5	8.9	9.8	V	
TFT Common electrode Voltage	VCOM	3.5	3.8	4.1	V	
Current Consumption of VDD	I _{DD}	-	40	50	mA	V _{DD} =3.3V
Current Consumption of AVDD	I _{AVDD}	-	35	1	mA	AV _{DD} =8.9V
Current Consumption of VGH	I _{VGH}	-	0.5	1	mA	V _{GH} =21V
Current Consumption of VGL	I _{VGL}	-			mA	V _{GL} =-8V





5.2 Timing Characteristics

5.2.1 AC Electrical Characteristics


Parameter	Symbol	Values			Unit	Remark
		Min.	Typ.	Max		
Clock frequency	R_{XFCLK}	40.8	51.2	67.2	MHz	
Input data skew margin	T_{RSKM}	500	-	-	ps	
Clock high time	T_{LVCH}	-	$4/(7 * R_{XFCLK})$	-	ns	
Clock low time	T_{LVCL}	-	$3/(7 * R_{XFCLK})$	-	ns	

5.2.2 Input Clock and Data Timing Diagram

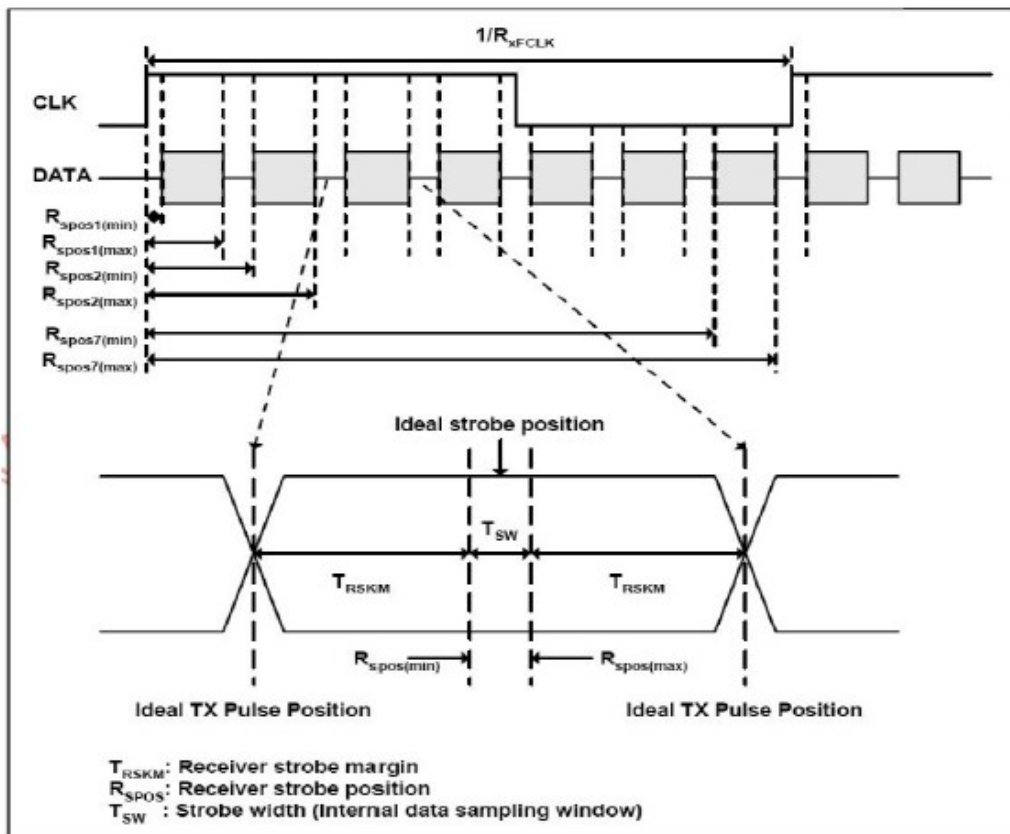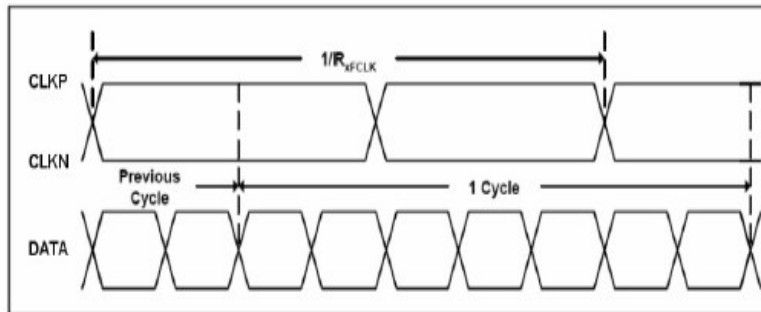

5.2.3 DC Electrical Characteristics

Parameter	Symbol	Values			Unit	Remark
		Min.	Typ.	Max		
Differential input high threshold voltage	R_{xVTH}	-	-	+0.1	V	$R_{xVCM}=1.2V$
Differential input low threshold voltage	R_{xIN}	-0.1	-	-	V	
Input voltage range (single-end)	R_{xVTL}	0.0	-	2.4	V	
Differential input common mode voltage	R_{xVCM}	$ V_{ID} /2$	-	$2.4- V_{ID} /2$	V	
Differential voltage	$ V_{ID} $	0.2	-	0.6	V	
Differential input leakage current	$R_{V_{XIZ}}$	-10	-	+10	μA	

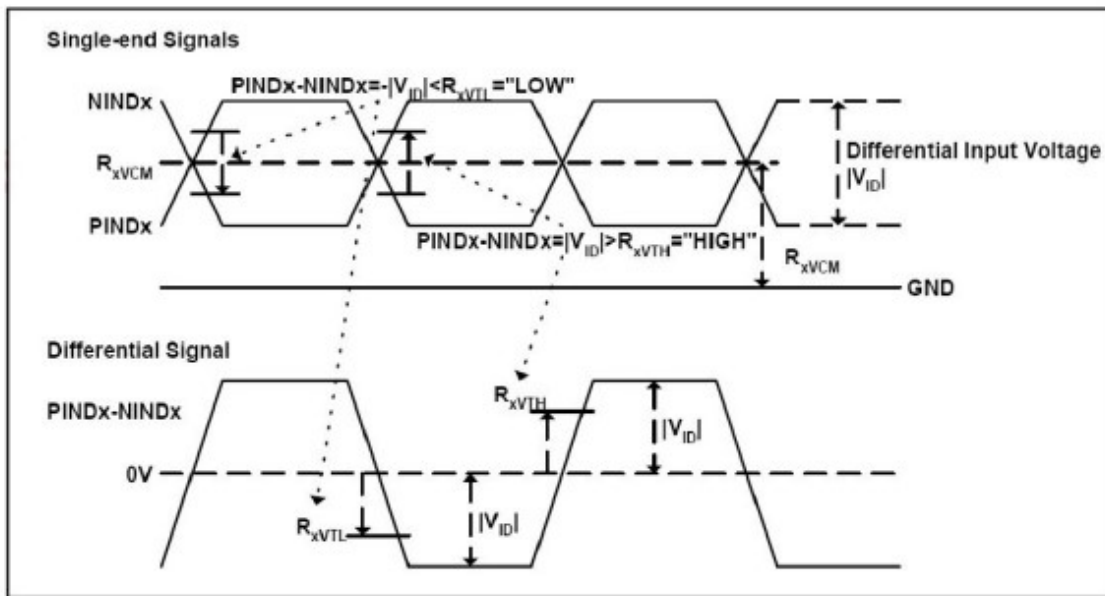


5.2.4 Timing


Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max		
Clock frequency	fclk	40.8	51.2	67.2	MHz	Frame rate=60Hz
Horizontal display area	thd	1024			DCLK	
HS period time	th	1114	1344	1400	DCLK	
HS Blanking	thb	90	320	376	DCLK	
Vertical display area	tvd	600			H	
VS period time	tv	610	635	800	H	
VS Blanking	thb	10	35	200	H	

5.2.4 Data Input Format

6bit LVDS input

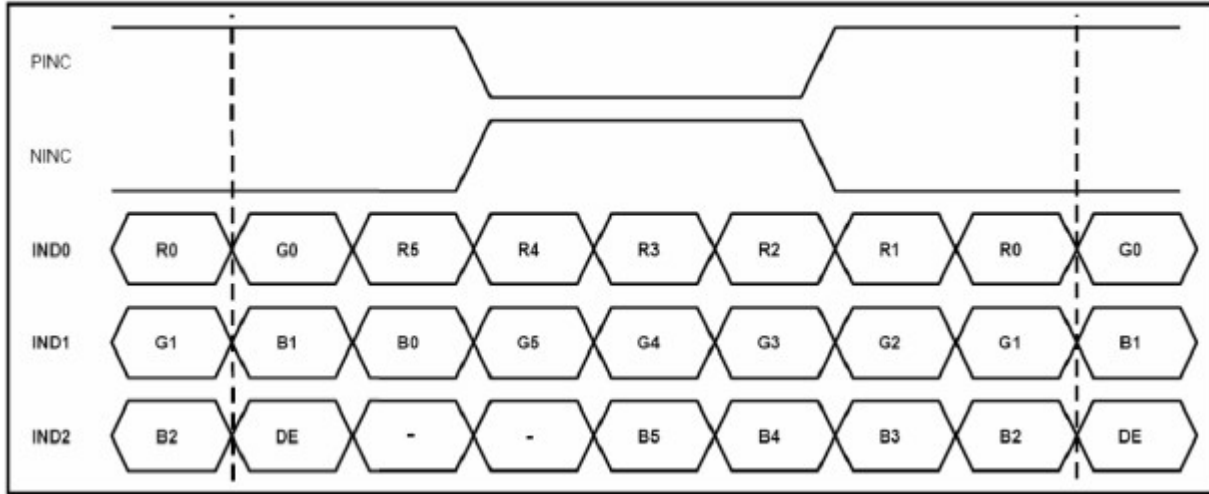

8bit LVDS input

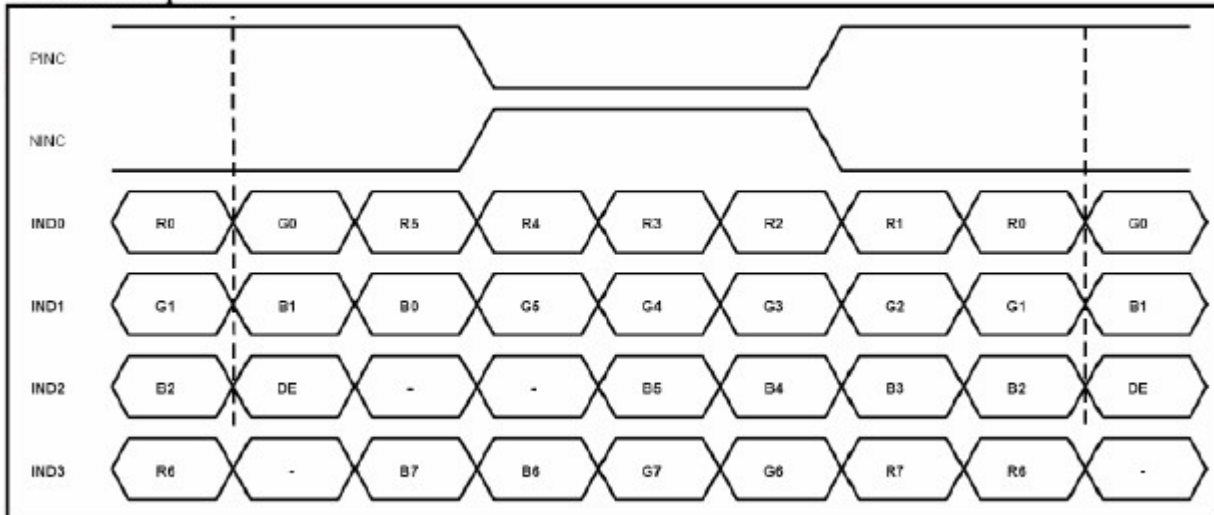

Note: Support DE timing mode only, SYNC mode not supported.

5.2.5 Reset Operation

Item	Symbol	Unit	Min.	Typ.	Max.
Reset low-level width	tRES	ms	1	-	-
Reset rise time	trRES	μs	-	-	10



5.4 Driving Backlight

Item	Symbol	MIN	TYP	MAX	Unit	Remark
Forward Current	I _F	-	240	290	mA	
Forward Voltage	V _F	8.4	9.3	9.9	V	
Backlight Power consumption	W _{BL}	-	-	-	W	

Note 1: Each LED : I_F =20 mA, V_F =3.2V.

Note 2: Optical performance should be evaluated at Ta=25°C only.

Note 3: If LED is driven by high current, high ambient temperature & humidity condition. The life time of LED will be reduced. Operating life means brightness goes down to 50% initial brightness. Typical operating life time is estimated data.



6 Optical Characteristics


Items	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark	
Viewing angles	θ_T	Center CR \geq 10	50	60	-	Degree.	Note2	
	θ_B		60	70	-			
	θ_L		60	70	-			
	θ_R		60	70	-			
Contrast Ratio	CR	$\Theta = 0$	500	600		-	Note1, Note3	
Response Time	T _{ON}	25° C	-	25	50	ms	Note1, Note4	
	T _{OFF}		-					
Chromaticity	White	Backlight is on	X _W	0.280	0.310	0.340	-	Note1, Note5
			Y _W	0.290	0.320	0.350	-	
	Red		X _R	0.550	0.590	0.630	-	
			Y _R	0.300	0.340	0.380	-	
	Green		X _G	0.301	0.341	0.381	-	
			Y _G	0.554	0.594	0.634	-	
	Blue		X _B	0.117	0.157	0.197	-	
			Y _B	0.075	0.115	0.155	-	
Uniformity	U		75	80	-	%	Note1, Note6	
NTSC				50		%	Note5	
Luminance	L		250	300			Note1, Note7	

Test Conditions:

1. IF= 20mA(one channel),the ambient temperature is 25° C
2. The test systems refer to Note 1 and Note 2.

Note 1:Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 minutes operation, the optical properties are measured at the center point of the LCD screen. All input terminals LCD panel must be ground when measuring the center area of the panel.

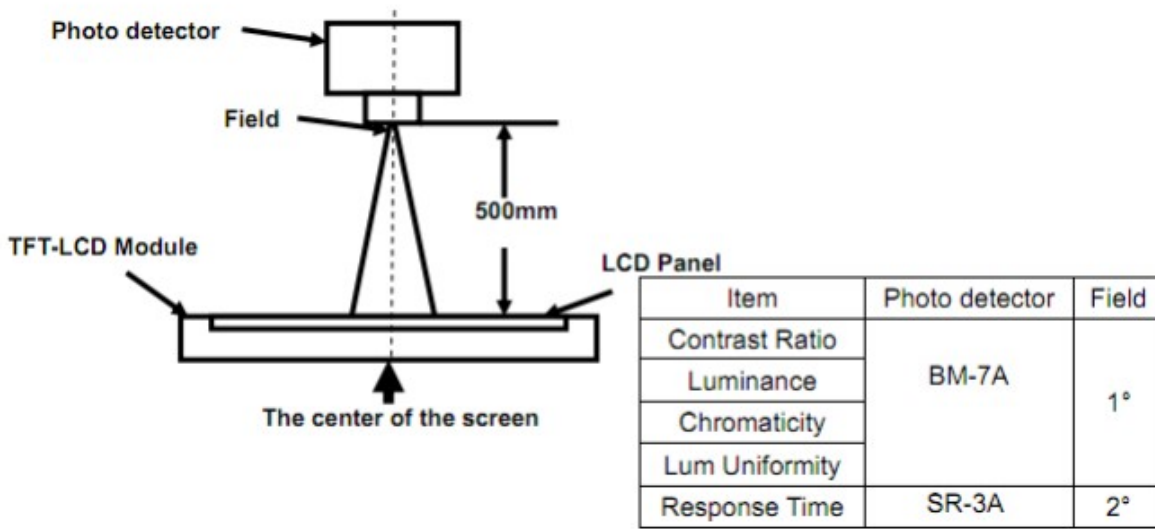

Note 2: Definition of viewing angle range and measurement system.
 viewing angle is measured at the center point of the LCD by CONOSCOPE(ergo-80).

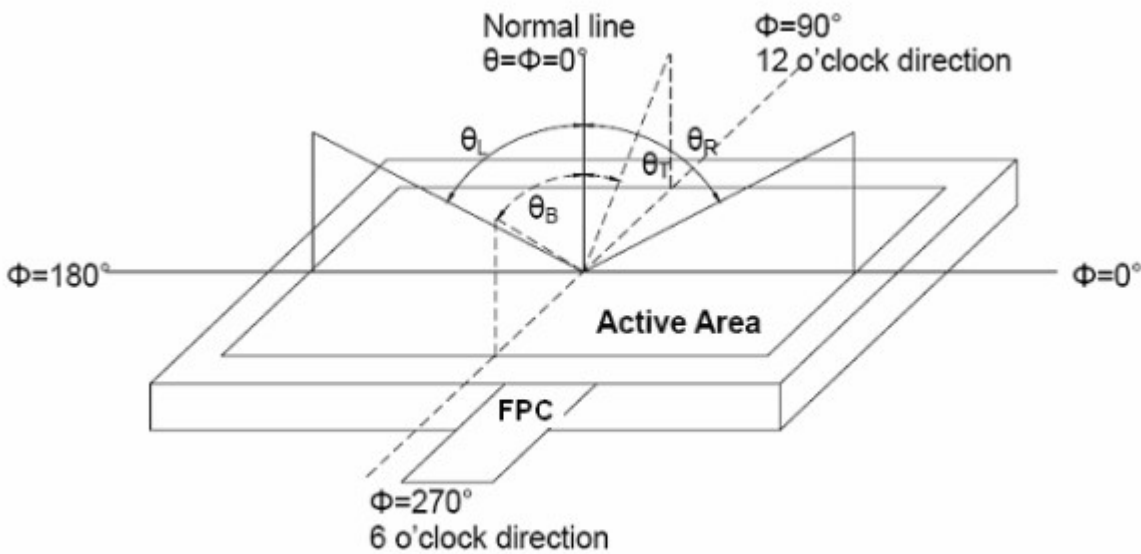



Fig. 1 Definition of viewing angle

Note 3: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$

Note 4: Definition of Response time

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time (TON) is the time between photo detector output intensity changed from 90% to 10%. And fall time (TOFF) is the time between photo detector output intensity changed from 10% to 90%.

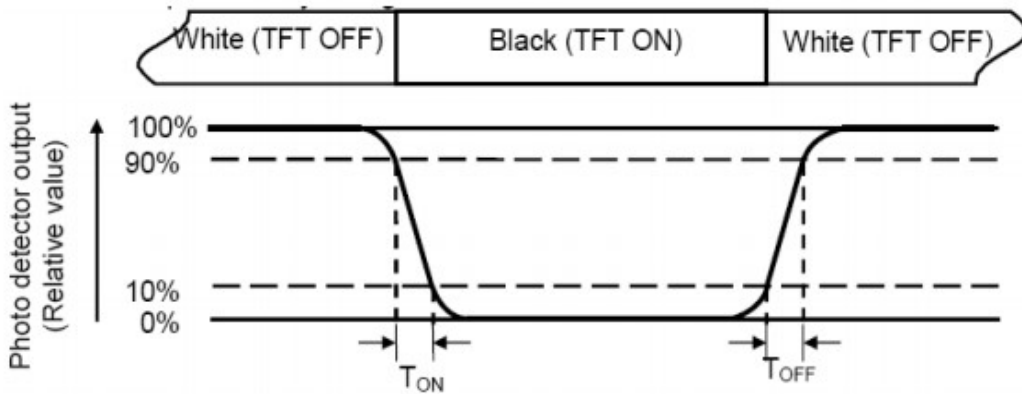

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity}(U) = L_{\min} / L_{\max} \times 100\%$$

L-----Active area length W----- Active area width

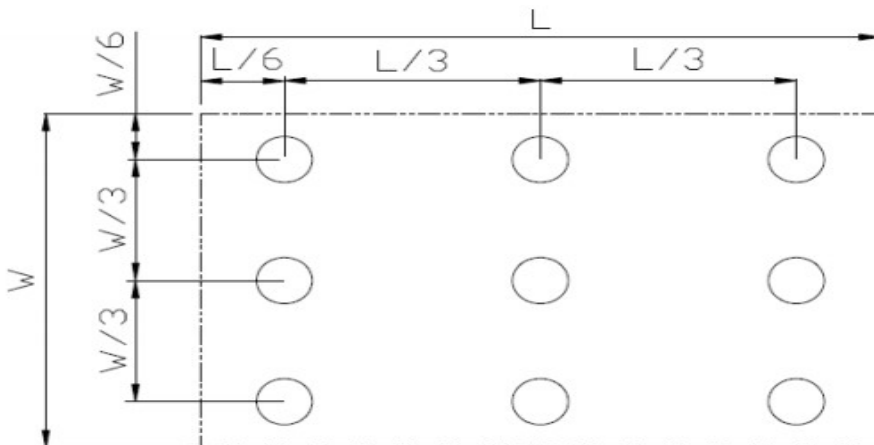


Fig. 2 Definition of uniformity

Lmax: The measured maximum luminance of all measurement position.

Lmin: The measured minimum luminance of all measurement position.

Note 7: Definition of Luminance :

Measure the luminance of white state at center point.



7 Environmental / Reliability Tests

No	Test Item	Condition	Remarks
1	High Temperature Opeartion	Ts= +70°C, 240hrs	Note 1 IEC60068-2-2, GB2423. 2-89
2	Low Temperature Opeartion	Ta= -20°C, 240hrs	Note 2 IEC60068-2-1 GB2423.1-89
3	High Temperature Storage	Ta= +80°C, 240hrs	IEC60068-2-2 GB2423. 2-89
4	Low Temperature Storage	Ta= -30°C, 240hrs	IEC60068-2-1 GB/T2423.1-89
5	High Temperature & Humidity Storage	Ta= +60°C, 90% RH max, 160 hours	IEC60068-2-3 GB/T2423.3-2006
6	Thermal Shock (Non-operation)	-30°C 30 min ~ +80°C 30 min Change time: 5min, 30 Cycle	Start with cold temperature,end with high temperature IEC60068-2-14, GB2423.22-87
7	Electro Static Discharge (Opeartion)	C=150pF, R=330 Ω, 5 points/panel Air: ±8KV, 5 times; Contact: ±4KV, 5 times; (Environment: 15°C ~ 35°C, 30% ~ 60%, 86Kpa ~ 106Kpa)	IEC61000-4-2 GB/T17626.2-1998
8	Vibration (Non-operation)	Frequency range: 10~55Hz, Stroke: 1.mm Sweep: 10Hz~55Hz~10Hz 2 hours for each direction of X .Y. Z. (package condition)	IEC60068-2-6 GB/T2423.5-1995
9	Shock (Non-operation)	60G 6ms, ± X, ± Y, ± Z 3 times for each direction	IEC60068-2-27 GB/T2423.5-1995
10	Package Drop Test	Height: 80 cm, 1 corner, 3 edges, 6 surfaces	IEC60068-2-32 GB/T2423.8-1995

Note: 1. Ts is the temperature of panel's surface.
2. Ta is the ambient temperature of sample.





8 Mechanical Drawing

Front View

Side View

Back View

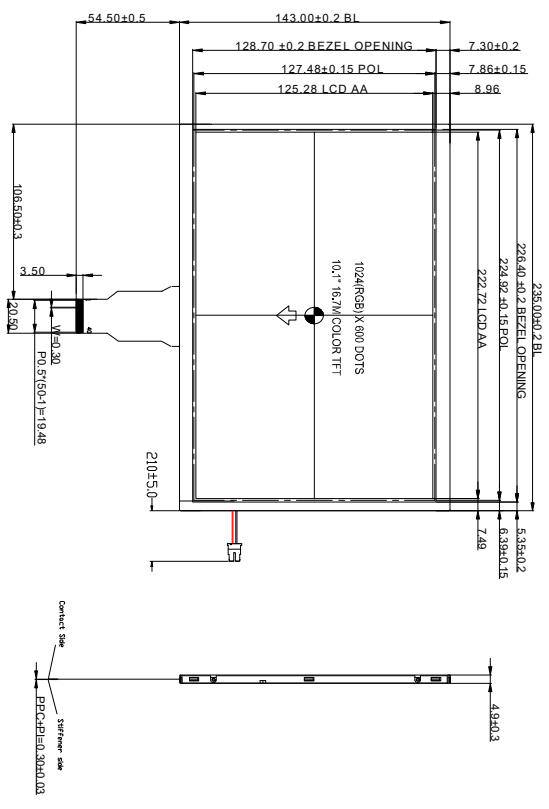






- LCM 10.1 NOTE:
1. 10.1" Transmissive Nema White TFT, 16M, 1024(RGB)X600
 2. Operating TEMP: -20°C~70°C
 3. Storage TEMP: -30°C~40°C
 4. Underline Tolerances: ±0.3mm
 5. The product should measure up with JEDEC standard
 6. (*) Reference dimension - Critical dimension

REV.	DATE	MODIFICATION
1.0	2017/05/31	First Issue
2.0	2017/07/11	Update Size

INTERFACE	LVDS Interface	MODEL NAME	AISON TECHNOLOGY (HK) CO., LIMITED	
	FPC Connector	TFT Display Module	PART NO.	Z101WS07
VIEWING DIRECTION	12 O'clock	DWN	REV.	2.0
VIEWING DIRECTION	12 O'clock	CHKD	TOLERANCE UNLESS SPECIFIED	±0.3
PROJECTION	3RD ANGLE	PROJECTION	UNIT	MM
			SCALE	1:1

1	FIN	MM
2	100	
3	100	
4	100	
5	100	
6	100	
7	100	
8	100	
9	100	
10	100	
11	100	
12	100	
13	100	
14	100	
15	100	
16	100	
17	100	
18	100	
19	100	
20	100	
21	100	
22	100	
23	100	
24	100	
25	100	
26	100	
27	100	
28	100	
29	100	
30	100	
31	100	
32	100	
33	100	
34	100	
35	100	
36	100	
37	100	
38	100	
39	100	
40	100	

9 Packing

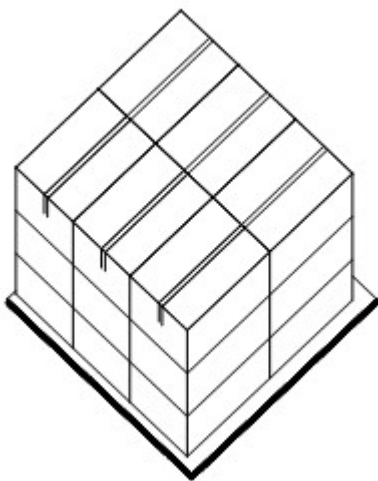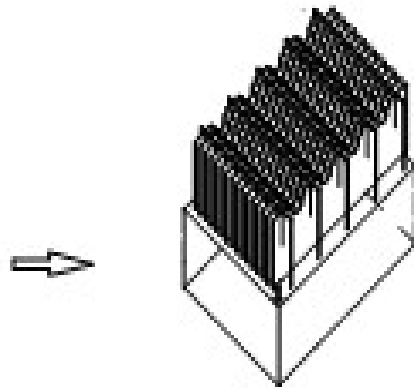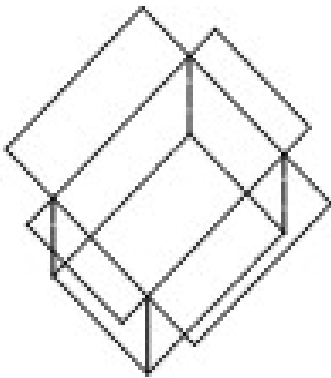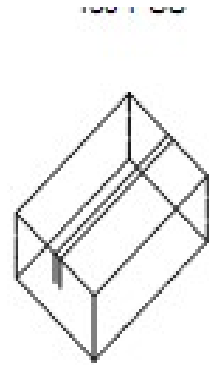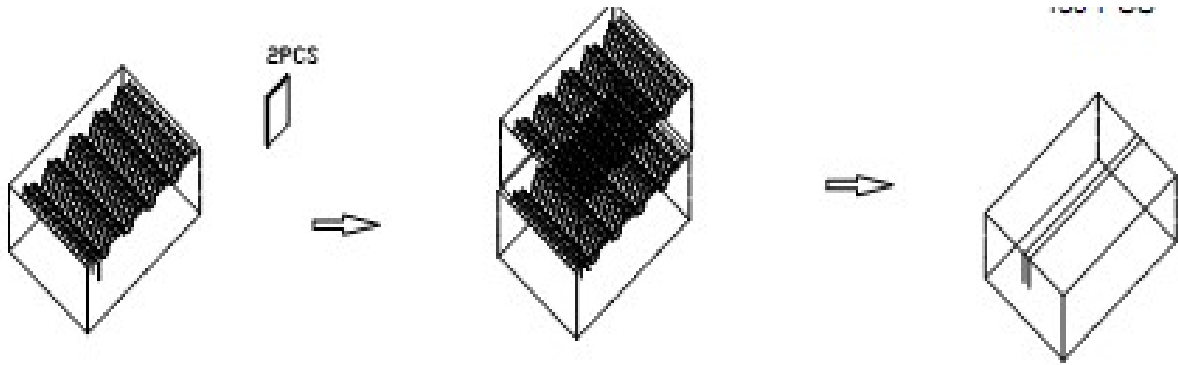



10. Precautions For Use of LCD modules

10.1 Handling Precautions

10.1.1. The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.

10.1.2. If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.

10.1.3. Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.

10.1.4. The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.

10.1.5. If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:

- Isopropyl alcohol
- Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following:

- Water
- Ketone
- Aromatic solvents

10.1.6. Do not attempt to disassemble the LCD Module.

10.1.7. If the logic circuit power is off, do not apply the input signals.

10.1.8. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

10.1.8.1. Be sure to ground the body when handling the LCD Modules.

10.1.8.2. Tools required for assembly, such as soldering irons, must be properly ground.

10.1.8.3. To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.

10.1.8.4. The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

10.2 Storage Precautions

10.2.1. When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

10.2.2. The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:

Temperature : 0°C ~ 40°C Relatively humidity: ≤80%

10.2.3. The LCD modules should be stored in the room without acid, alkali and harmful gas.

10.3 Transportation Precautions

The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.